


PLAN : ground floor a.c and eletrical layout
24.07.2025

AL-1

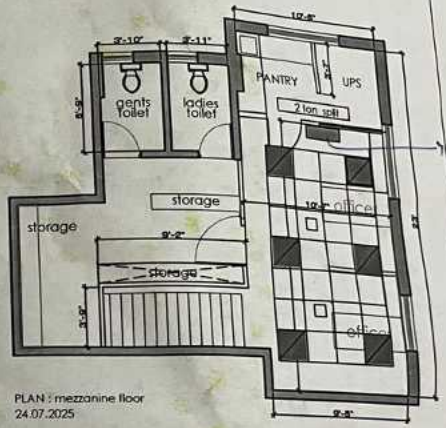

PLAN : mezzanine floor
24.07.2025

Ground flr - HT - 10.1 ft
Ceiling ht - 8.0 ft

Mezz floor height - 8.7 ft
Ceiling height - 7.7 ft

1) Cable - 2.5 - 35 ft Copper
2) Cable 3.0 - 45 ft Copper
3) 8 pair 3M Cabin - 63 ft Copper
4) Total Cable wire - 52 mtr
5) Total Drain pipe 25mm - 25 mtr
6) ODU Fabricated Stand modification - 03 nos & L bracket - 03 nos
7) ATM Existing 8 pair cable Uninst & reinstallation req - 02 nos
8) Mezzanin 8 pair cable - 2.0 TR 01 nos
   - Copper - 15 ft
   - Cable - 20 ft
   - Drain - 20 ft
9) Timer for ATM cable - 01 nos

PROPOSED INTERIORS FOR COSMOS
@ bhau daji road, matunga.

DESIGNERS
RACHANA DECOR
24383947.9820446417 / 18. email - rachna_int@rediffmail.com